
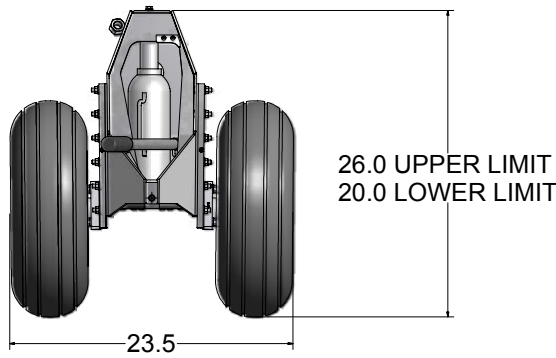


EQUIVALENT:
 NSN 1730-01-133-9204
 214-706-104-101/105
 214-706-104-003 (OLD STYLE)
 212-050-200-105/107
 204-050-200-005/101

SPECIFICATIONS:
 ATTACH POINTS 2EA. EYE BOLTS
 16.41" & 17.875" CENTERS
 OPERATION: HYDRAULIC 8 TON JACK.
 HI GROSS 10,000 LBS./SIDE
 TIRE SIZE: 18 X 5.5 105 PSI
 APPROXIMATE SKID LIFT 6"
 PICK UP EYE TO TOP OF FRAME 16"
 WEIGHT EACH SIDE = 95 LBS.
 SHIPPING DIMENSIONS 19 X 20 X 21
 FINISH: POWDER COAT ORANGE,
 CUSTOM COLORS AVAILABLE ON
 REQUEST.

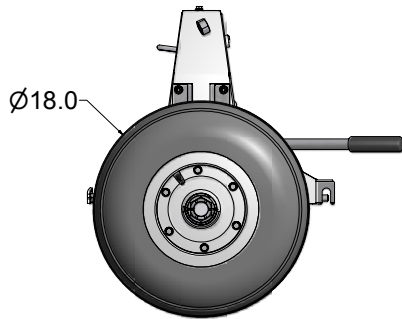

BDW-245B-1801

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	W-245B-00	WELDED FRAME ASM.
2	2	W-245B-04	AXLE SLIDE
3	2	W-245B-05L	GUIDE LEFT
4	2	W-245B-05R	GUIDE RIGHT
5	4	W-245B-08	WEAR PLATE
6	1	W-245B-09	JACK BASE
7	2	W-245B-11	SPINDLE
8	1	W-245B-13	STOP
9	1	W-245-14-00	JACK HANDLE
10	1	W-245B-15A	BUMP PAD
11	1	W-245B-15B	BUMP PAD
12	1	W-245-22C	JACK
13	2	W-245-25	CASTLE NUT
14	1	W-245B-29	PIN
15	1	W-245B-30	KEEPER PLATE
16	1	CL-8-BLPI-3.00-C	BALL LOCK PIN
17	2	TIRE/WHEEL ASM. (SEE WHEEL ASM. SHEET FOR WHEEL BREAKDOWN)	TIRE/WHEEL ASM.
18	24	5/16-18 X 1 1/2	BOLT
19	24	WASHER 5/16 SAE	WASHER
20	24	5/16-18	LOCK NUT
21	8	3/8	LOCK WASHER
22	8	3/8-24 X 1 1/4	BOLT
23	2	1/8 X 2 1/2	COTTER PIN
24	3	HCLW 1/4 SS	STAINLESS STEEL HIGH COLLAR LOCK WASHER
25	2	1/4-20 X 3/4	ALLEN HEAD BOLT
26	3	10-32 X 3/4 SS BHCS	BUTTON HEAD CAP SCREW
27	1	MCM6391K132	BUSHING
28	1	WASHER FENDER 1/4	FENDER WASHER
29	1	1/4-20 X 1	BOLT
30	6	3/16 X 1/2	ALUMINUM RIVET
31	1	S-264	SPRING
32	4	ZERK 1/4-28	ZERK FITTING
33	1	#10	HI COLLAR LOCK WASHER
N.S.	2	W-5.30-8 TB	INNER TUBE
N.S.	2	W-18 X 5.5 TR	TIRE
N.S.	OPT.	608500N SEAL KIT	REPAIR KIT FOR 8 TON NORCO JACK

